

# BWT b.Connect

## Versatile filter monitoring tool

BWT b.Connect is an innovative solution to intelligently network and control BWT water filters. You can conveniently monitor and control your filter from anywhere using this advanced IOT technology – via GSM or WiFi. Whether you want to monitor filter capacity during the day or overall consumption, you will be able to view every location of your products 24/7 in real-time (in WiFi mode). You will be able to see your fleet status and all your water filter applications at a glance and will be able to manage these using your app or the web dashboard. The tool will notify you when the next filter change is coming up using the “filter exchange forecast”, so you will always have the best protection for your equipment and will prevent malfunctions. With BWT b.Connect you will be the captain of your water filter fleet! Thanks to the user-friendly app (BWT Best Water Professional App) and the BWT b.PRO web dashboard you will be able to access important information anywhere, at any time and adjust settings. Make your home, hospitality business or company fit for the future of water optimization with BWT b.Connect!



## The data visualizer




### Your benefits

- Central login
- Product and usage recommendations
- Configuring products
- Automatic service date reminders
- Installation and service documentation
- Available for iOS and Android devices – accessible via every browser
- Multi-lingual user interface
- Works both on new installations and when retrofitting existing equipment
- What you'll get in real-time: consumption data, operating data, service and refill notifications
- Set up user notifications

# BWT b.Connect

## TECHNICAL DATA

OPERATING CONDITIONS	
Operating voltage	5 VDC external mains electricity supply or 3xAA battery cells IEC LR6 or FR6 when run on batteries
Working height	< 2000 m
Operating temperature	0 – 35 °C
Humidity during operations	20 – 80 % non-condensing
Temperature during transport and storage	-10 – 50 °C
Humidity during transport and storage	10 – 90 % RH non-condensing
Ambient conditions	No direct sunlight, no external vibrations
IP rating	IPO0
Dimensions	98 x 65 x 37 mm
Order no.	125252067
Scope of delivery	<ul style="list-style-type: none"> <li>▪ b.Connect box (GSM and WiFi)</li> <li>▪ Power supply</li> <li>▪ Aquameter 3/8" for b.Connect</li> <li>▪ Supplement sheet</li> <li>▪ 1x Connector Flex x M 3/8" straight</li> <li>▪ 2x oval fasteners</li> </ul>
<b>SPARE PARTS</b>	
125564042	Aquameter 3/8" for b.Connect
125553830	b.Connect box (GSM und WiFi)
125553831	Power Adapter 5V/2A, AC/DC connector

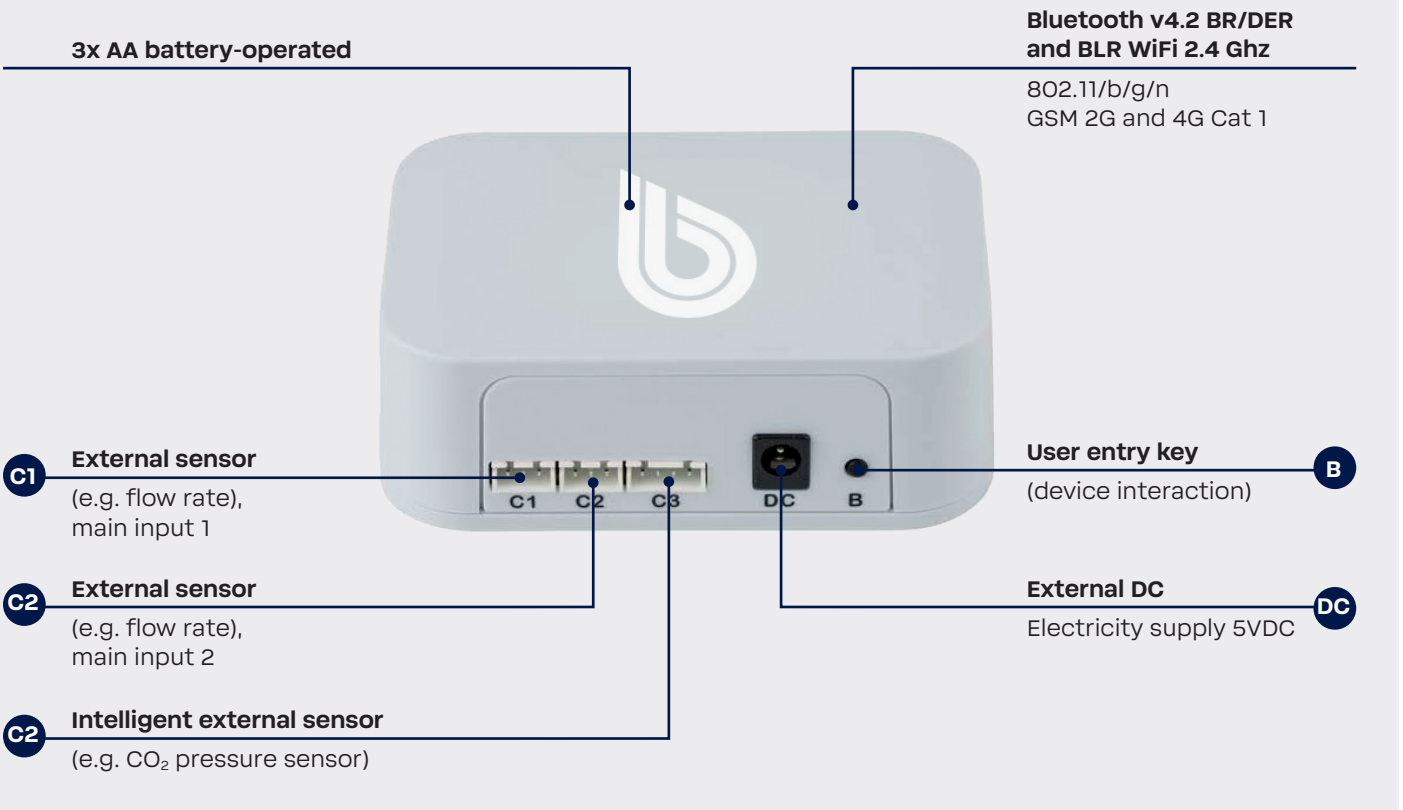

### MANUFACTURER:

**BWT Holding GmbH:**  
Walter-Simmer-Str. 4  
5310 Mondsee, Austria  
bwt-wam.com

### SALES:

**BWT water+more  
Deutschland GmbH:**  
info@water-and-more.de  
Tel.: +49 611 58019-0