
BWT bestaroma



FILTER CARTRIDGE FOR THE WATER TANK OF COFFEE AND ESPRESSO MACHINES

BWT bestaroma PREMIUM is a water filter used directly in special water tanks with the tank-in-tank principle of coffee machines. Meaning the BWT bestaroma Premium fits in the standardized intakes provided by many manufacturers. No pressure is used for filtration. Once poured in the raw water flows through the filter so there is always perfectly optimized coffee water available in the coffee machine storage tank. BWT bestaroma PREMIUM stands out due to its high efficiency and easy handling. The filter has BWT Magnesium Technology, which takes calcium out of the water and enriches it with magnesium in exchange using a special BWT ion exchanger.

The benefits: perfect protection for machines from limescale and mineralizing the water with magnesium as a flavour enhancer, ensuring the full aroma of the coffee can develop and a perfect crema on espressos that you make yourself. In addition, activated carbon safely reduces all unwanted tastes and odours. BWT bestaroma PREMIUM can be distributed worldwide with all types of water in drinking water quality. All the materials of this filter are food safe.

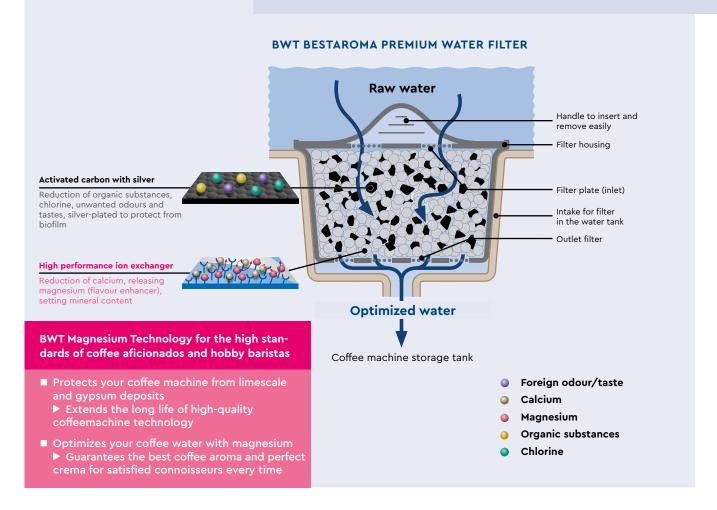



BWT bestaroma

TECHNICAL DATA

BWT bestaroma PREMIUM	
Ø Upper filter insert in mm	89.6
Ø Lower filter insert in mm	82.8
Height of filter insert without handle in mm	40.0
Height of filter insert with handle in mm	56.5
Weight in g	135
Order no. filter	KS20P00A00

COMPATIBILITY OF **BWT BESTAROMA PREMIUM**

- Coffee machines with BRITA* AquaAroma filter cartridge
- Servomat Steigler**: Cino, LaRhea (tank-in-tank solution).
- * BRITA is a registered trademark of BRITA GmbH, Taunusstein.
- ** Cino and LaRhea registered trademarks of Servomat Steigler Vertriebsund Beratungs-GmbH.

CAPACITIES


Filter capacity at 14° Total hardness	145 litres			
Total		Cup volumes/Number of cups and total hardness		
hardness		35 ml	70 ml	150 ml
<8	soft	6,950	3,452	1,611
8 – 14	medium	4,143	2,071	967
> 14	hard	2,959	1,480	690


Subject to changes.




NOTES ABOUT INSTALLATION AND CHANGING FILTERS

First installation





Changing filters



Before you use the BWT bestaroma PREMIUM Filter, please descale the coffee machine. Remove the air from the filter cartridge by placing it in cold water for 10 min (A) and place in the water tank intake 3. If the maximum number of cups per filter type and total hardness is reached or the coffee machine shows change filter in the display, the filter has been used up. Then change it immediately or for reasons of hygiene after 3 months at the latest (e). Please clean the water tank regularly and only use cold water of drinking water quality.

SALES:



